



■ Dimensions (unit : mm)

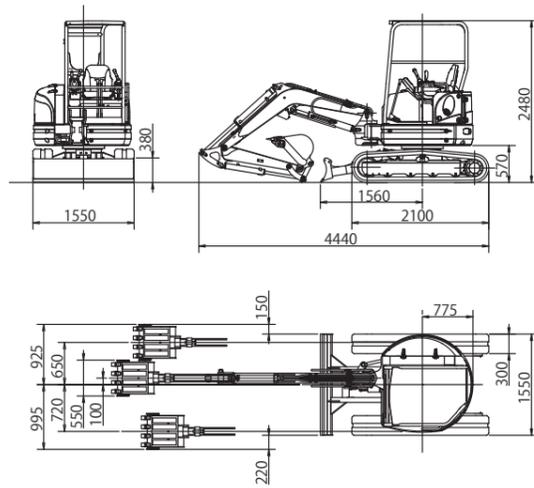

■ Working Range (unit : mm)

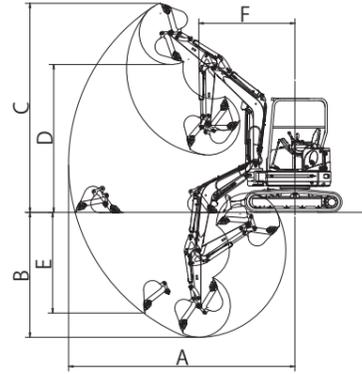

		Std. Arm	Long arm
A	Max. digging radius	4900	5190
B	Max. digging depth	2700	3000
C	Max. digging height	4630	4720
D	Max. dumping height	3290	3390
E	Max. vertical digging depth	2210	2470
F	Min. front turning radius	2080	2110
	At right boom swing	1790	1820

■ 30V4 Specifications

◇ Performance

Bucket capacity	0.09m <sup>3</sup>
Bucket width	550mm
Operating weight : Canopy (Cabin)	3105 (3255) kg
Transportation weight : Canopy (Cabin)	3030 (3180) kg
Swing speed	9.0min <sup>-1</sup>
Travel speed (low/high)	2.7 / 4.7km/h
Gradeability	58% (30°)
Ground pressure	28kPa (0.29kgf/cm <sup>2</sup> )
Max bucket digging force	29.1kN (2970kgf)

◇ Engine

Model	YANMAR 3TNV88
Rated output (EU version)	17.5kW (23.8PS) /2200min <sup>-1</sup>
Rated output (Tier 4 version)	16.8kW (22.8PS) /2200min <sup>-1</sup>
Fuel tank capacity	42L

- Please read carefully instruction manuals before operating machines, and use them correctly and safely.
- Please perform periodically check and maintenance for machines to prevent from troubles and accidents.
- Photographs may differ in some cases from actual objects. Specifications are subject to change without notice due to technical improvements or modifications.

◇ Boom swing system

Type	Boom offset with hydraulic cylinder
Swing angle (L/R)	80° / 50°

◇ Hydraulic system

Pressure	24.5MPa (250kgf/cm <sup>2</sup> ) 20.6MPa (210kgf/cm <sup>2</sup> )
Pump hydraulic flow	37.4 L/min×2+ 23.1L/min

◇ Dozer blade

Size	1550×380mm
Lift above ground / Drop below ground	375mm / 440mm

◇ Max auxiliary flow

1st line	61L/min
2nd line	23L/min

Distributed by:

**IHI**  
Realize your dreams

Zero Tail Swing Mini Excavator

**30V**  
*Four*



**IHI**

Realize your dreams

IHI Construction Machinery Limited

Sales Division

3174 Showa-machi, Kanazawa-ku, Yokohama, Kanagawa 236-8611, Japan  
Tel: +81-45-276-1249 Fax: +81-45-276-2583  
<http://www.ihikenki.co.jp>

IHI Construction Machinery Limited

**THE ALL NEW V4  
THAT BRINGS IN  
CUSTOMER NEEDS**



*Safety*

*Comfortable*



*Economy*

*High Performance*

**FOUR EVOLUTION**

# Safety EVOLUTION

## WORLD-STANDARD SAFETY

- ROPS/FOPS Compliance Operator Room
- ROPS/FOPS Canopy (Standard)
- ROPS Cabin (Option) • FOPS Cabin (Option)

## ERROR-PREVENTION

- All-lever lock structure
- Neutral engine-start structure
- Auto-parking brake in swing & traction motors




All operations are blocked when the lever is raised.

# Comfortable EVOLUTION


## COMFORTABLE OPERATOR ROOM AND EASY MANIPULATION



- Easily visible monitor



- 1 Travel speed indicator
- 2 Glow indicator
- 3 Battery charge warning indicator
- 4 Engine oil pressure warning indicator
- 5 Water temperature warning indicator
- 6 Auto idle indicator
- 7 Control lock warning indicator
- 8 Water-separator warning indicator
- 9 ECO mode indicator
- 10 Water temperature gauge
- 11 Fuel gauge
- 12 Hour meter

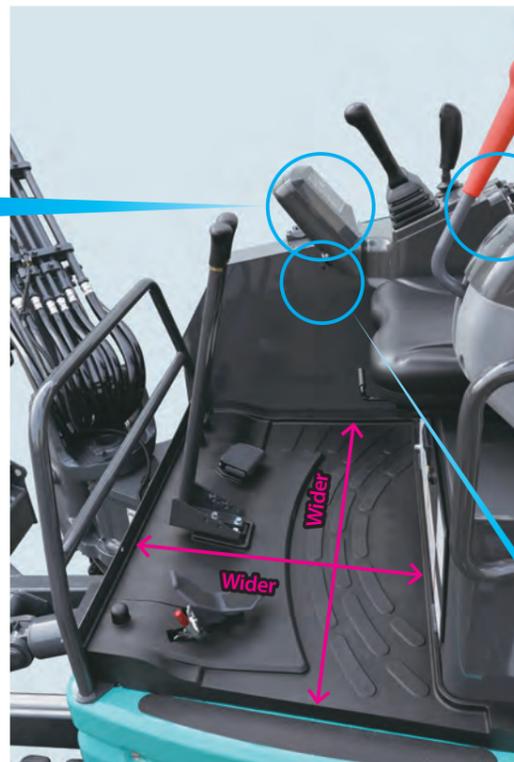

- Legroom enlarged by 20%
- Cabin room enlarged by 25%

\*Comparison with our former model



ROPS/FOPS Canopy (Std.)



ROPS Cabin (Opt.)



- Centralized switches (Right console box)

- A Engine starter switch
- B Throttle dial
- C Auto Idle selector switch
- D Light switch
- E Work mode selector switch




- Spare power port (12V 10A)

# Economy EVOLUTION

## LOW FUEL CONSUMPTION

- Max. 24% fuel saving


\*Comparison with our former model (in use of auto-idle and eco-mode)

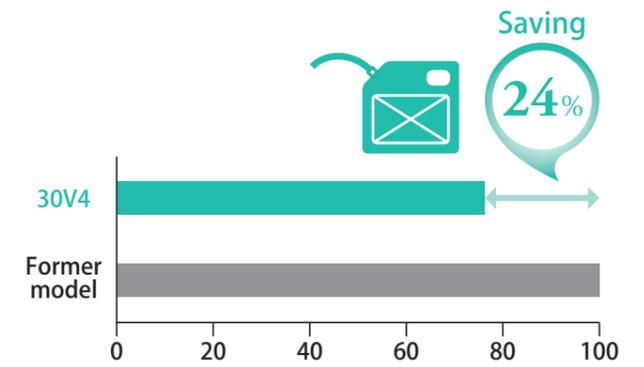


## DURABLE AND REPAIRABLE

- Warranted and durable rubber shoes "Tough Track"

The rubber shoe is warranted for either 2 years or 1500 hours against steel cord cut-off. (Terms and conditions are based on our warranty standards.)



Overlap structure (Conventional)




Tough Track spiral structure

	Conventional	Tough Track
Core metal shape		
Core metal edge FEM analysis		


- Easily adjustable pins and longer life




Single-structured Swing Pin



Boom and Arm joints



Arm-end




Bucket rattle adjuster

- Durable structure and easy care

## EASY MAINTENANCE

- Engine room



- Large covers for easier access



- Right hand cover

- Trouble reduction by 3 measures



\* The warning indicator turns on if water is collected up to the specified level.

## SELECTABLE WORKING MODES

Workable slowly and economically

**ECO Mode**  
(Fuel saving)


Selectable

Workable speedily

**Vmax Mode**  
(High speed)

## HIGH POWER DIGGING AND QUICK RESPONSE

- Digging force increased by 10%  
(\*Comparison with our former model)
- Quickly responsive 3-pump system

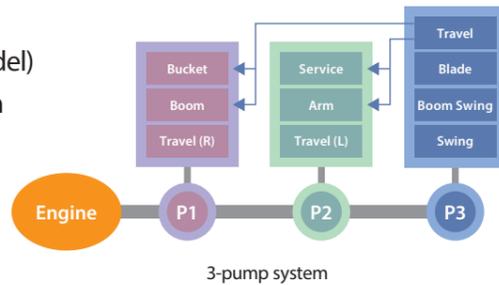

## EASY SKIMMING WORK


- Close distance between Bucket Tooth and Dozer Blade



- Large and robust Dozer Blade



## EASY FUEL REFILLING

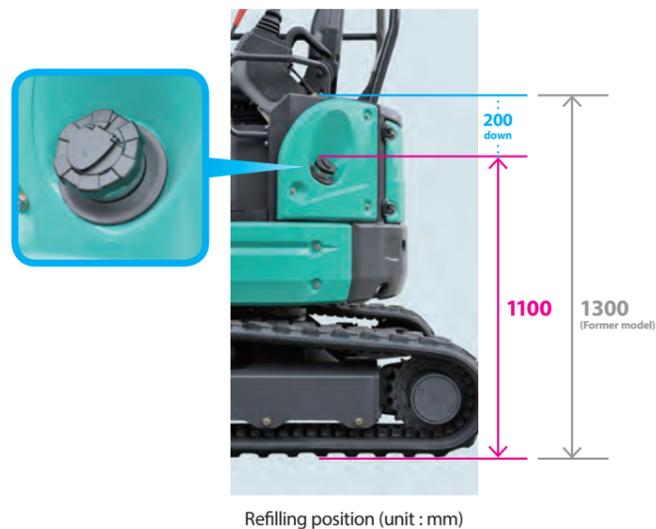

## AUTO-SHIFT TRACTION

- Automatically shifted travel function



## EQUIPMENT / OPTIONS

Description	Standard equipment	Optional equipment	Remarks
Operator room	ROPS/FOPS Canopy (4-Post)	ROPS Cabin <sup>(A)</sup>	2-Post Canopy <sup>(B)(※)</sup>  (※) No ROPS compatibility
		FOPS Guard	
		Heater or Air-conditioner	
Seat	Suspension Seat	High back suspension seat <sup>(C)</sup>	Fabric suspension seat
Control lever	with propotional switch <sup>(D)</sup>	w/o propotional switch (※)	(※) combination with <sup>(G)</sup>
Lever pattern	Type A (ISO standard)	AF changer	ABCD changer <sup>(E)</sup>
Control pedal	Boom swing pedal	Traction foot pedals <sup>(F)</sup>	1st aux. hydraulic control pedal <sup>(G)</sup>
Crawler	Rubber shoes	Steel shoes	Rubber Pads <sup>(H)</sup>
Arm	Standard arm	Long arm (+300mm)	
Buacket	Standard bucket	Digging buckets (※)	Loading buckets (※) (※) Various sizes
Auxiliary hydraulics	1st auxiliary hydraulic piping	2nd auxiliary hydraulic piping	3rd auxiliary hydraulic piping

Other options	Remarks
● Dust preventive net	For Radiator
● Rear-view mirror	For combination with Steel Cabin
● Additional counterweight <sup>(I)</sup>	
● Overload relief valve	
● Motion alarm	

